

X3D SENSORS

Optimise operations and boost performance with our X3D sensors. Delivering precise real-time visitor data and actionable insights.

Key features:

- Exceptional accuracy with Bi-directional visitor counting
- At least 98% accuracy, even in crowded areas.
- Dwell time analysis to identify how long customers spend in key zones.
- Suppression of non-human objects or movements (i.e. trolleys).
- Up to 10 counting lines and 8 zones per sensor.
- Customized setup through the Cross Point portal.




Boost operations!

Optimise staff planning and gain insights on the success of advertising campaigns and promotions.



X3D SENSOR dimensions:

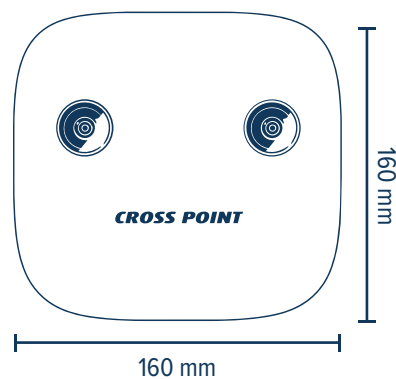

X3D SENSORS

Bi-directional visitor counting and dwell time analysis, empower you to make data-driven decisions and enhance the customer experience.

Specifications:

Power supply	Power-over-ethernet (PD Class 0)
Power consumption	< 8 W
Connectivity	1000BaseT, PoE, RJ45 socket
Required illuminance	3 lux
Reliability	> 10 years
Standards	EMC CE, FCC

Performance

Bi-directional visitor counting
Maximum monitored area
Min height/Max height
Housing
Operating temperature
Ingress protection
Dimensions (W / H / D)
Weight

X3D90

✓
Up to 5 x 6 m
2 m / 4 m
Aluminium & Plastics
0°C to +55°C
IP30
160/160/42 mm
400 g


X3D180

✓
Up to 8 x 8 m
3 m / 6 m
Aluminium
-25°C to +70°C
IP40
237/99/37 mm
600 g

X3D90



X3D180

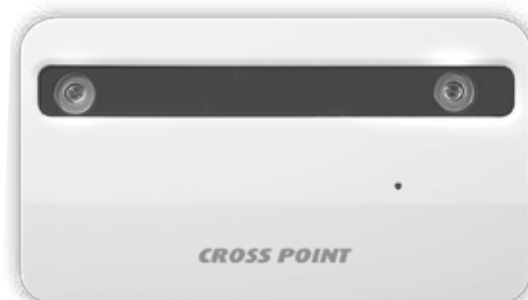

THE CROSS POINT PORTAL

The Cross Point portal gives you full control over all installed X-series products, whether you are locally wireless connected in the store through the Cross Point app or connected remotely through the Cross Point portal. Take full control over your sensors, deactivators and antennas.